


DH7512-S

Receiving Card

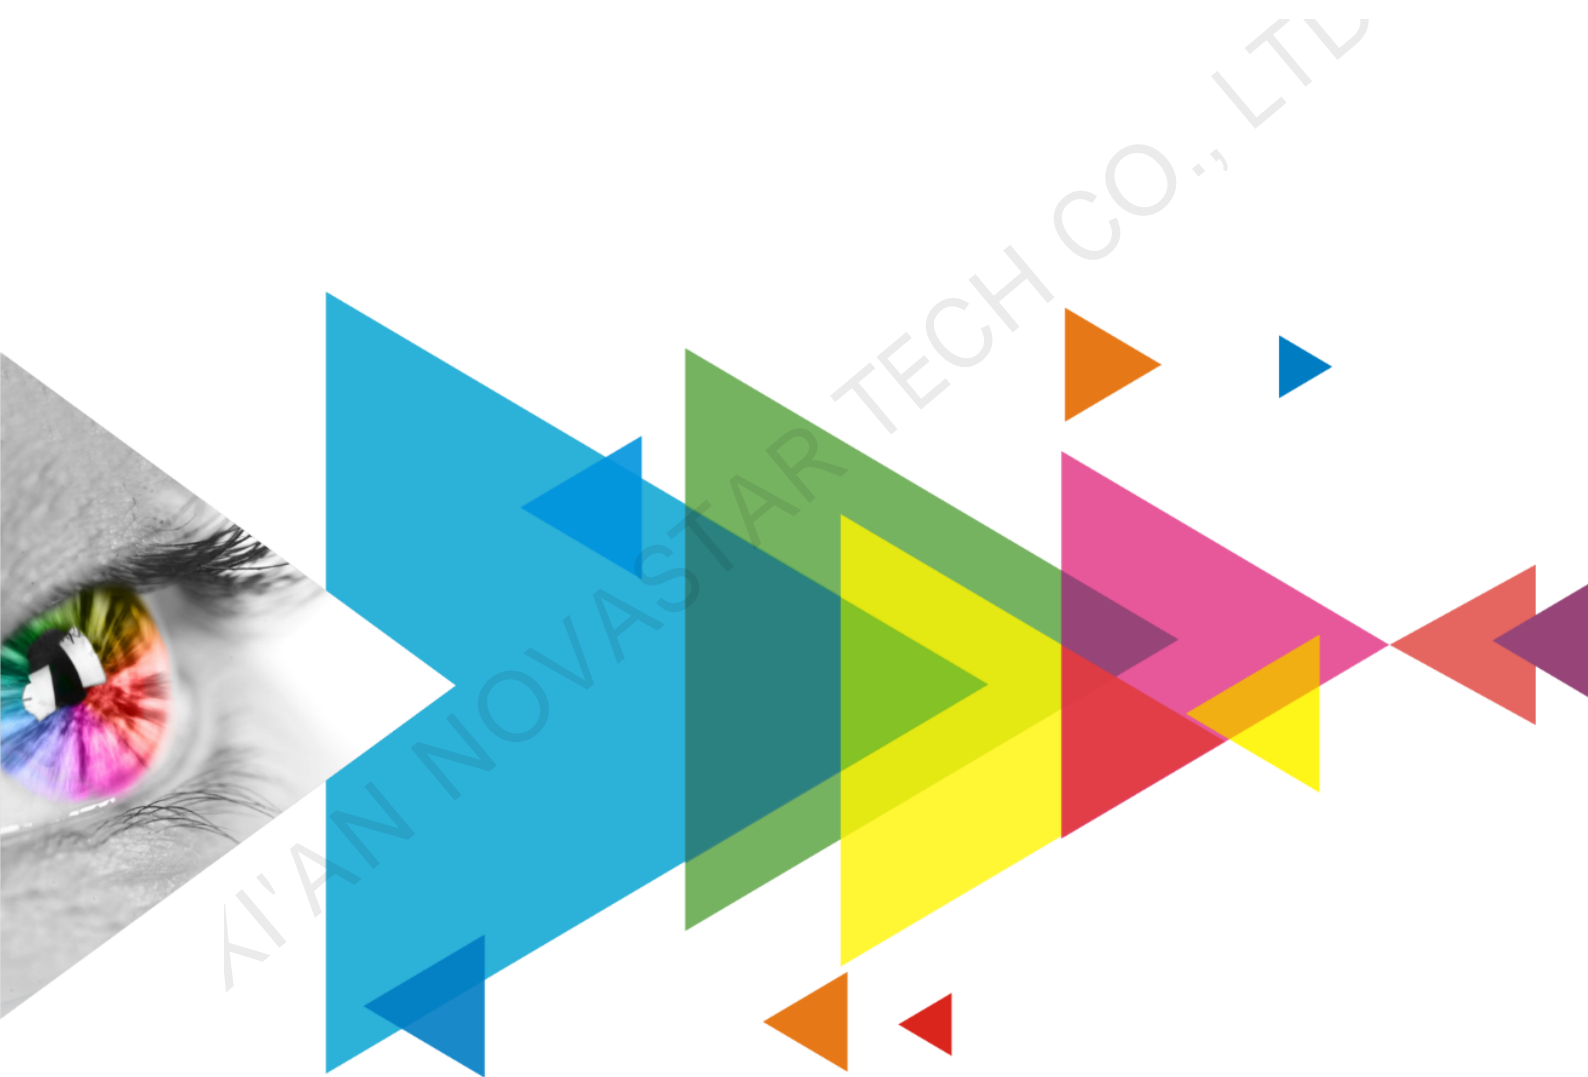

Specifications

Change History

| Document Version | Release Date | Description |
|------------------|--------------|--|
| V1.1.3 | 2022-08-31 | <ul style="list-style-type: none"> Added the table of appearance description. Updated the input voltage. Updated the packing information. |
| V1.1.2 | 2022-07-12 | Updated the appearance diagram. |
| V1.1.1 | 2022-04-21 | Updated the dimensions diagram. |
| V1.1.0 | 2022-04-13 | Updated the appearance diagram. |
| V1.0.0 | 2022-03-21 | First release |

Introduction

The DH7512-S is a general receiving card developed by Xi'an NovaStar Tech Co., Ltd. (hereinafter referred to as NovaStar). A single DH7512-S supports resolutions up to 512×384@60Hz (NovaLCT V5.3.1 or later required). Supporting various functions such as pixel level brightness and chroma calibration, quick adjustment of dark or bright lines, 3D, individual gamma adjustment for RGB, and image rotation in 90° increments, the DH7512-S can significantly improve the display effect and user experience.

The DH7512-S uses 12 standard HUB75E connectors for communication and supports up to 24 groups of parallel RGB data. On-site setup, operation, and maintenance were all taken into account when designing the hardware and software of the DH7512-S, allowing for an easier setup, more stable operation, and more efficient maintenance.

Certifications

RoHS, EMC Class A

If the product does not have the relevant certifications required by the countries or regions where it is to be sold, please contact NovaStar to confirm or address the problem. Otherwise, the customer shall be responsible for the legal risks caused or NovaStar has the right to claim compensation.

Features

Improvements to Display Effect

- Pixel level brightness and chroma calibration
Work with NovaStar's high-precision calibration system to calibrate the brightness and chroma of each pixel, effectively removing brightness differences and chroma differences, and enabling high brightness consistency and chroma consistency.
- Quick adjustment of dark or bright lines
The dark or bright lines caused by splicing of modules and cabinets can be adjusted to improve the visual experience. The adjustment can be easily made and takes effect immediately.
- 3D function
Working with the sending card that supports 3D function, the receiving card supports 3D image output.
- Individual gamma adjustment for RGB
Working with NovaLCT (V5.2.0 or later) and the controller that supports this function, the receiving card supports individual adjustment of red gamma, green gamma and blue gamma, which can effectively control image non-uniformity at low grayscale conditions and white balance offset, allowing for a more realistic image.
- Image rotation in 90° increments
The display image can be set to rotate in multiples of 90° (0°/90°/180°/270°).


Improvements to Maintainability

- **Mapping function**
The cabinets can display the receiving card number and Ethernet port information, allowing users to easily obtain the locations and connection topology of receiving cards.
- **Setting of a pre-stored image in receiving card**
The image displayed on the screen during startup, or displayed when the Ethernet cable is disconnected or there is no video signal can be customized.
- **Temperature and voltage monitoring**
The receiving card temperature and voltage can be monitored without using peripherals.
- **Cabinet LCD**
The LCD module of the cabinet can display the temperature, voltage, single run time and total run time of the receiving card.
- **Bit error detection**
The Ethernet port communication quality of the receiving card can be monitored and the number of erroneous packets can be recorded to help troubleshoot network communication problems.
NovaLCT V5.2.0 or later is required.
- **Firmware program readback**
The receiving card firmware program can be read back and saved to the local computer.
NovaLCT V5.2.0 or later is required.
- **Configuration parameter readback**
The receiving card configuration parameters can be read back and saved to the local computer.

Improvements to Reliability

- **Loop backup**
The receiving card and sending card form a loop via the main and backup line connections. If a fault occurs at a location of the lines, the screen can still display the image normally.
- **Dual program backup**
Two copies of firmware program are stored in the application area of the receiving card at the factory to avoid the problem that the receiving card may get stuck abnormally during program update.

Appearance

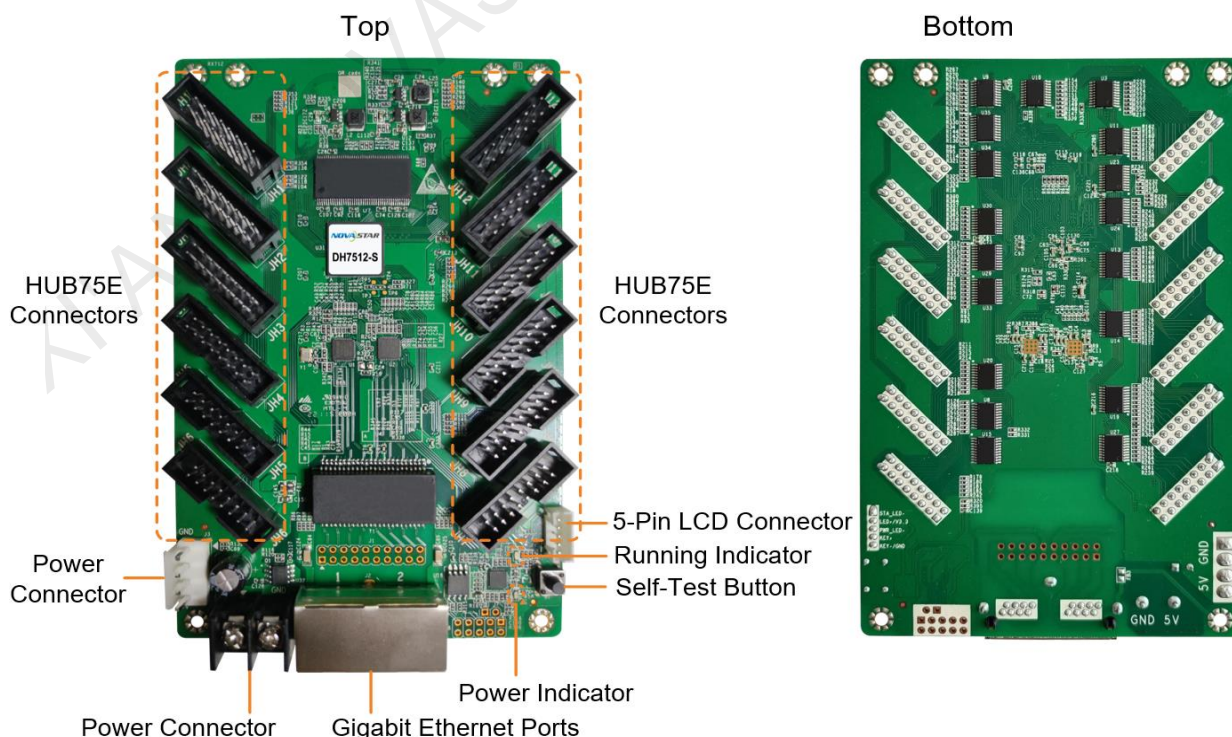

All product pictures shown in this document are for illustration purpose only. Actual product may vary.


| Name | Description |
|------------------------|--|
| HUB75E Connectors | Connect to the module. |
| Power Connector | Connect to the input power. Either of the connectors can be chosen. |
| Gigabit Ethernet Ports | Connect to the sending card, and cascade other receiving cards. Each connector can be used as input or output. |
| Self-Test Button | Set the test pattern. After the Ethernet cable is disconnected, press the button twice, and the test pattern will be displayed on the screen. Press the button again to switch the pattern. |
| 5-Pin LCD Connector | Connect to the LCD. |

Indicators

| Indicator | Color | Status | Description |
|-------------------|-------|-----------------------------|---|
| Running indicator | Green | Flashing once every 1s | The receiving card is functioning normally. Ethernet cable connection is normal, and video source input is available. |
| | | Flashing once every 3s | Ethernet cable connection is abnormal. |
| | | Flashing 3 times every 0.5s | Ethernet cable connection is normal, but no video source input is available. |
| | | Flashing once every 0.2s | The receiving card failed to load the program in the application area and is now using the backup program. |
| | | Flashing 8 times every 0.5s | A redundancy switchover occurred on the Ethernet port and the loop backup has taken effect. |
| Power indicator | Red | Always on | The power supply is normal. |

Dimensions

The board thickness is not greater than 2.0 mm, and the total thickness (board thickness + thickness of components on the top and bottom sides) is not greater than 19.0 mm. Ground connection (GND) is enabled for mounting holes.

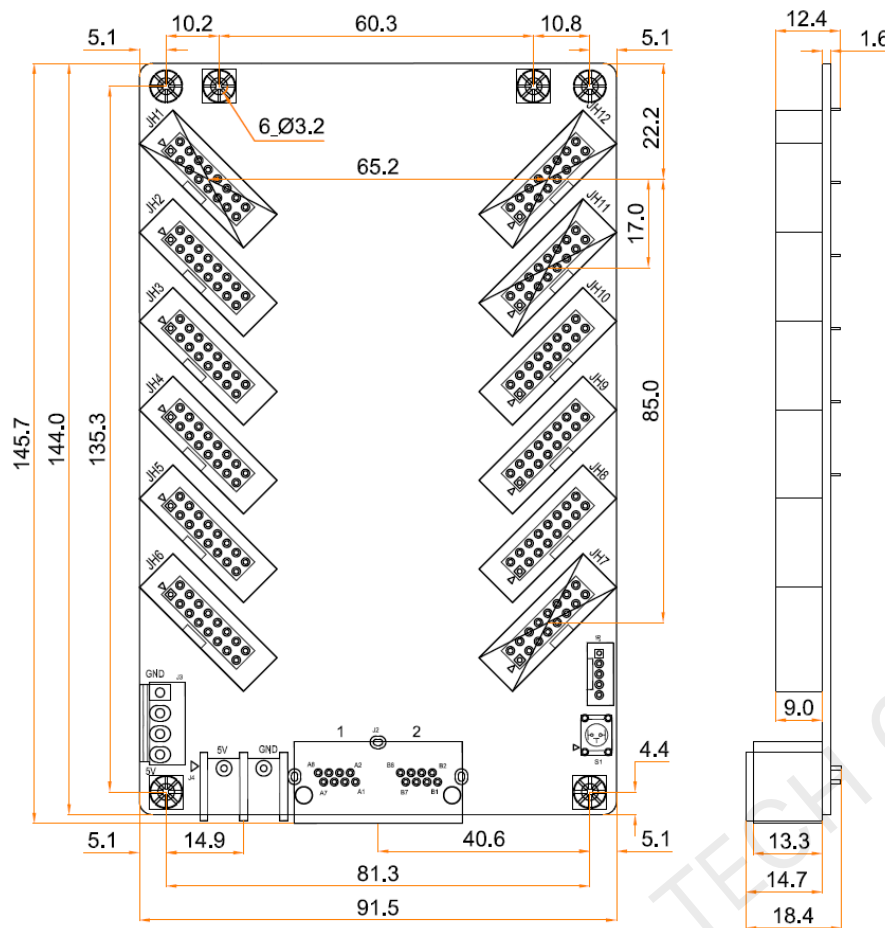Tolerance: ± 0.3 Unit: mm

To make molds or trepan mounting holes, please contact NovaStar for a higher-precision structural drawing.

Pins

| | | |
|--|--|---|
| JH1 R1 1 2 4 G1 B1 3 3 4 GND R2 5 5 6 G2 B2 7 5 6 HE1 HA1 9 7 8 10 HB1 HC1 11 9 10 12 HD1 HDCLK1 13 11 12 14 HLAT1 HOE1 15 13 14 16 GND | JH2 R3 1 2 4 G3 B3 3 3 4 GND R4 5 5 6 G4 B4 7 5 6 HE15 HA15 9 7 8 10 HB15 HC15 11 9 10 12 HD15 HDCLK2 13 11 12 14 HLAT2 HOE2 15 13 14 16 GND | JH3 R5 1 2 4 G5 B5 3 3 4 GND R6 5 5 6 G6 B6 7 5 6 HE2 HA2 9 7 8 10 HB2 HC2 11 9 10 12 HD2 HDCLK3 13 11 12 14 HLAT3 HOE3 15 13 14 16 GND |
| JH4 R7 1 2 4 G7 B7 3 3 4 GND R8 5 5 6 G8 B8 7 5 6 HE16 HA16 9 7 8 10 HB16 HC16 11 9 10 12 HD16 HDCLK4 13 11 12 14 HLAT4 HOE4 15 13 14 16 GND | JH5 R9 1 2 4 G9 B9 3 3 4 GND R10 5 5 6 G10 B10 7 5 6 HE3 HA3 9 7 8 10 HB3 HC3 11 9 10 12 HD3 HDCLK5 13 11 12 14 HLAT5 HOE5 15 13 14 16 GND | JH6 R11 1 2 4 G11 B11 3 3 4 GND R12 5 5 6 G12 B12 7 5 6 HE11 HA11 9 7 8 10 HB11 HC11 11 9 10 12 HD11 HDCLK6 13 11 12 14 HLAT6 HOE6 15 13 14 16 GND |
| JH7 R21 1 2 4 G21 B21 3 3 4 GND R22 5 5 6 G22 B22 7 5 6 HE6 HA6 9 7 8 10 HB6 HC6 11 9 10 12 HD6 HDCLK11 13 11 12 14 HLAT11 HOE11 15 13 14 16 GND | JH8 R23 1 2 4 G23 B23 3 3 4 GND R24 5 5 6 G24 B24 7 5 6 HE14 HA14 9 7 8 10 HB14 HC14 11 9 10 12 HD14 HDCLK12 13 11 12 14 HLAT12 HOE12 15 13 14 16 GND | JH9 R25 1 2 4 G25 B25 3 3 4 GND R26 5 5 6 G26 B26 7 5 6 HE7 HA7 9 7 8 10 HB7 HC7 11 9 10 12 HD7 HDCLK13 13 11 12 14 HLAT13 HOE13 15 13 14 16 GND |
| JH10 R27 1 2 4 G27 B27 3 3 4 GND R28 5 5 6 G28 B28 7 5 6 HE9 HA9 9 7 8 10 HB9 HC9 11 9 10 12 HD9 HDCLK14 13 11 12 14 HLAT14 HOE14 15 13 14 16 GND | JH11 R29 1 2 4 G29 B29 3 3 4 GND R30 5 5 6 G30 B30 7 5 6 HE8 HA8 9 7 8 10 HB8 HC8 11 9 10 12 HD8 HDCLK15 13 11 12 14 HLAT15 HOE15 15 13 14 16 GND | JH12 R31 1 2 4 G31 B31 3 3 4 GND R32 5 5 6 G32 B32 7 5 6 HE10 HA10 9 7 8 10 HB10 HC10 11 9 10 12 HD10 HDCLK16 13 11 12 14 HLAT16 HOE16 15 13 14 16 GND |

| Pin Definitions (Take JH1 as an example) | | | | | |
|--|--------|----|----|-------|----------------------|
| / | R1 | 1 | 2 | G1 | / |
| / | B1 | 3 | 4 | GND | Ground |
| / | R2 | 5 | 6 | G2 | / |
| / | B2 | 7 | 8 | HE1 | Line decoding signal |
| Line decoding signal | HA1 | 9 | 10 | HB1 | Line decoding signal |
| Line decoding signal | HC1 | 11 | 12 | HD1 | Line decoding signal |
| Shift clock | HDCLK1 | 13 | 14 | HLAT1 | Latch signal |
| Display enable signal | HOE1 | 15 | 16 | GND | Ground |

Specifications

| | | |
|---------------------------|-------------------------|--|
| Maximum Resolution | 512×384@60Hz | |
| Electrical Specifications | Input voltage | DC 3.8 V to 5.5 V |
| | Rated current | 0.5 A |
| | Rated power consumption | 2.5 W |
| Operating Environment | Temperature | −20°C to +70°C |
| | Humidity | 10% RH to 90% RH, non-condensing |
| Storage Environment | Temperature | −25°C to +125°C |
| | Humidity | 0% RH to 95% RH, non-condensing |
| Physical Specifications | Dimensions | 145.7 mm × 91.5 mm × 18.4 mm |
| | Net weight | 93.1 g Note: It is the weight of a single receiving card only. |
| Packing Information | Packing specifications | Each receiving card is packaged in a blister pack. Each packing box contains 100 receiving cards. |
| | Packing box dimensions | 625.0 mm × 180.0 mm × 470.0 mm |

The amount of current and power consumption may vary depending on various factors such as product settings, usage, and environment.

Copyright © 2022 Xi'an NovaStar Tech Co., Ltd. All Rights Reserved.

No part of this document may be copied, reproduced, extracted or transmitted in any form or by any means without the prior written consent of Xi'an NovaStar Tech Co., Ltd.

Trademark

 is a trademark of Xi'an NovaStar Tech Co., Ltd.

Statement

Thank you for choosing NovaStar's product. This document is intended to help you understand and use the product. For accuracy and reliability, NovaStar may make improvements and/or changes to this document at any time and without notice. If you experience any problems in use or have any suggestions, please contact us via the contact information given in this document. We will do our best to solve any issues, as well as evaluate and implement any suggestions.

Official website
www.novastar.tech

Technical support
support@novastar.tech